


H1080 Flooded Suction Pump


Metal Liner And Impeller

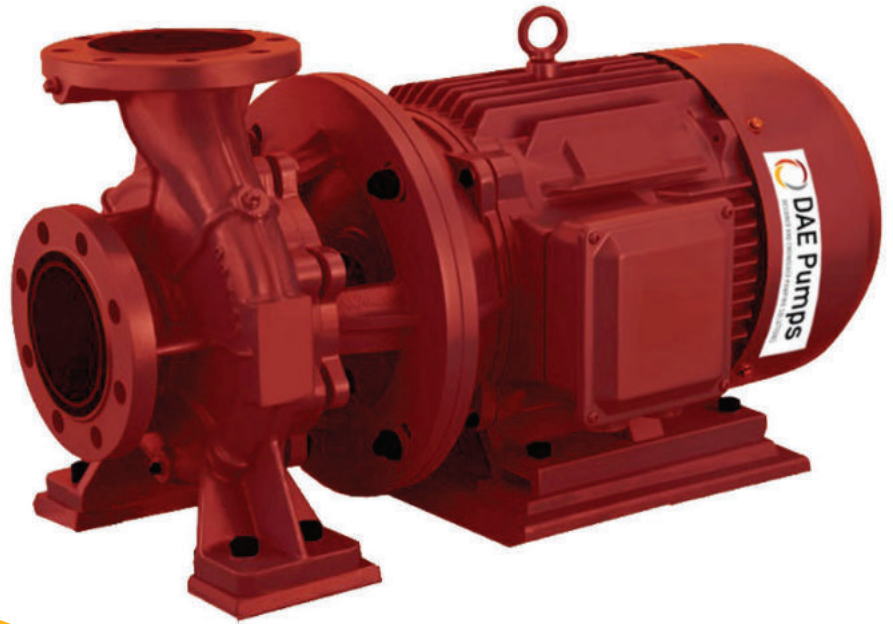

DAEPUMPS.COM

info@daepumps.com

(760) 821-8112

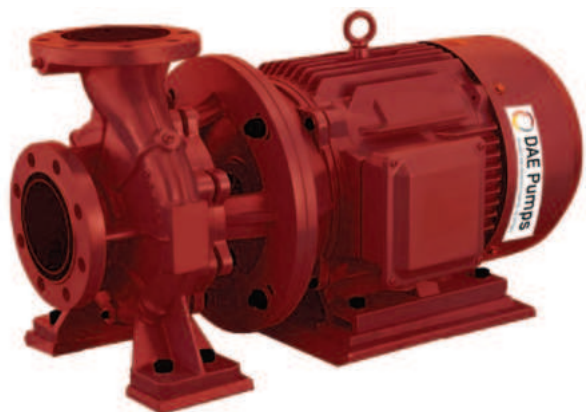

VERSATILE HEAVY-DUTY SOLUTION

DAE Pumps H1080 flooded suction pumps are heavy duty horizontal slurry pumps designed to handle the transfer of abrasive and high-density slurries in mining and heavy industry.

H1080 pumps feature a rugged cast iron construction with replaceable wear liners available in 27% chrome white iron, rubber or urethane to suit a wide range of applications, slurry types and consistencies.

The H1080 pumps are 8-inch discharge and feature high efficiency performance capable of flow rates up to 8300 GPM and a head up to 210 ft.

They are designed to be interchangeable with the most common slurry pump footprints used by the mining industry.

H1080 pumps are manufactured using the highest quality materials to ensure reliability and extended service life in heavy duty applications. H1080 pumps are manufactured with a rugged cast iron outer casing which features reinforcing ribs for excellent high-pressure strength and safety.

WEAR LINERS

A range of replaceable wear liners are available in 27% chrome white iron, rubber or urethane to suit the requirements of specific applications and slurry types. Wear liners are easily replaced when required by simply removing the front cover plate bolts and sliding off the front cover. This allows minimal downtime and simple servicing for maintenance staff.

H1080 Flooded Suction Pump

Heavy duty, horizontal slurry pumps. High efficiency transfer of abrasive and high-density slurries with extended wear life and reliable service intervals

FEATURES

10" Intake / 8" Discharge

8300 GPM

Over 210 Ft. Head

27% Chrome White Iron

IMPELLERS

The impeller features pump-out vanes on the rear face to prevent recirculation. Impellers are available in 27% chrome white iron or rubber to suit the requirements of the pumped product and are easily accessible by simply removing the front cover plate bolts and sliding off the front cover.

EXTERNAL IMPELLER ADJUSTMENT

An external impeller adjustment bolt is located under the bearing assembly and is easily accessible. This allows for changes to be made to the impeller clearance to maximize efficiency and service life without removing the front cover plate or disconnecting pipe-work or the bearing assembly. The system allows quick and simple adjustments to be made to compensate for wear and changes in operating conditions and duty points.


H1080 Flooded Suction Pump

Specifications

Inlet/Outlet	Bearing Frame	Max Power	Max Particle Size	Impeller	No. of Vanes	Impeller Material	Impeller / Vane Dia.	Wear Liner Material
10" / 8"	F	350 HP / 260 kW	3" / 76 mm	FAM8147 G8147	5	27% Chrome White Iron	27" / 686 mm	27% Chrome White Iron
	ST	750 HP / 560 kW						
	X (743)	950 HP / 710 kW						


	Dimensions (mm)															Weight
	A	B	C	D	Key	E	F	G	H	J	K	L	M	N	U	Metal
10x8 F	1646	991	705	610	28x16	279	683	673	419	635	-	12	333	134	100	3193 kg (7040 lbs)
10x8 ST	1748	1150	780	650	32x18	280	692	673	419	635	27	-	333	143	120	3742 kg (8250 lbs)

Pump Curve

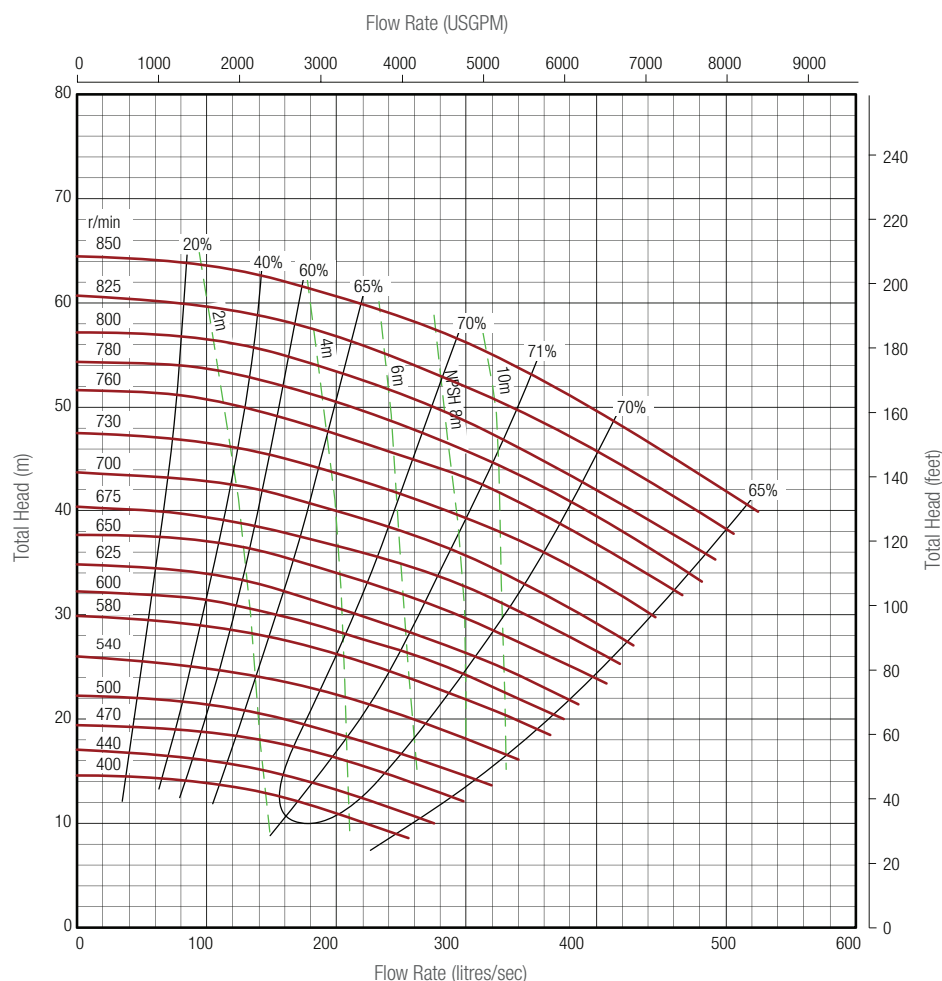


Performance curve is for clean, cold water only. Contact us to discuss pump selections for specific applications.


Dimensions

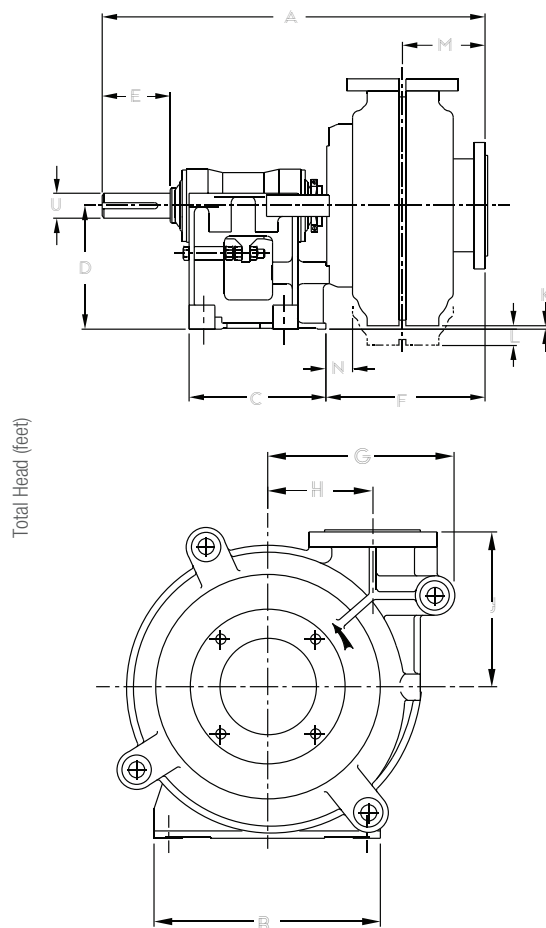

Materials Metal Lined Pumps

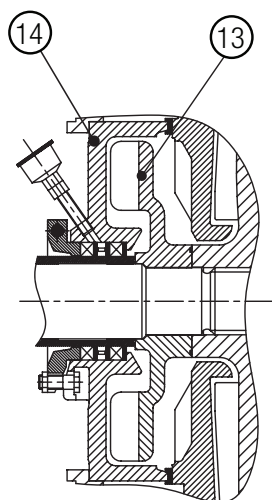

METAL EXPELLER

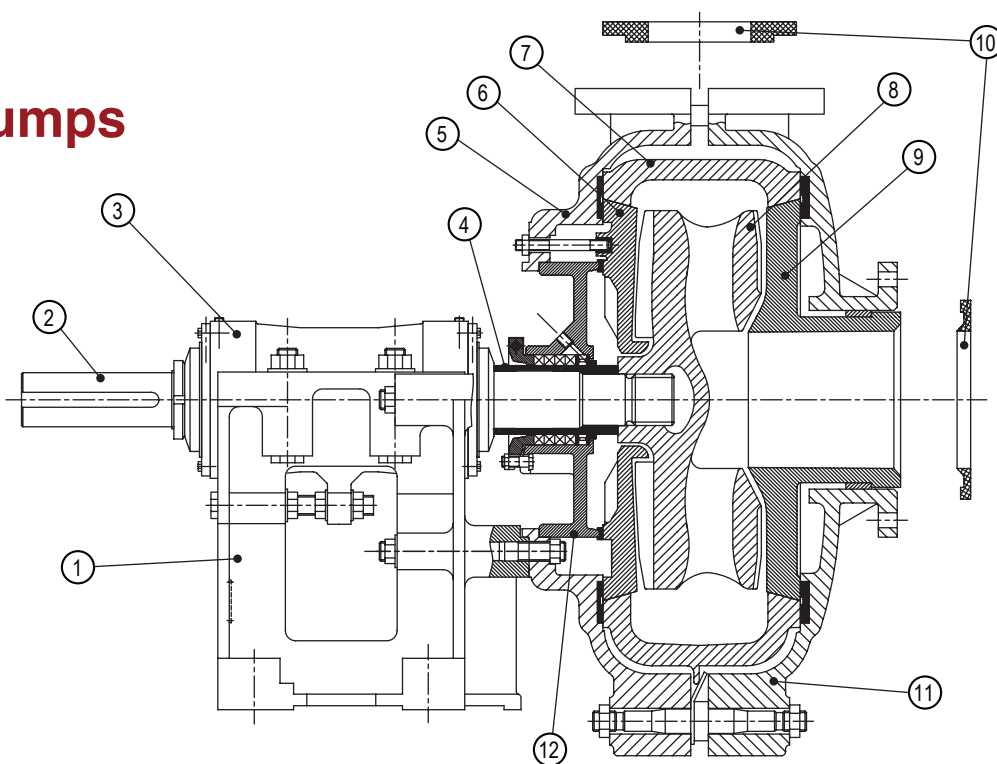

No.	Part Description	Material Specification
1	Base	Cast Iron
2	Shaft	4140 High Tensile Steel*
3	Bearing Assembly	Timkin (Cast Iron Body)
4	Shaft Sleeve	420 Stainless Steel
5	Pump Casing	Cast Iron
6	Frame Plate Liner	27% Chrome White Iron
7	Volute Liner	27% Chrome White Iron
8	Impeller	27% Chrome White Iron
9	Throat Bush	27% Chrome White Iron
10	Joint Rings	Rubber
11	Cover Plate	Cast Iron
12	Stuffing Box	Cast Iron
13	Expeller	27% Chrome White Iron
14	Expeller Ring	Natural Rubber
	Bolts	Zinc Plated Steel
	O-rings	Nitrile Rubber
	Seals	Rubber

* Other shaft material options are available.

