

H540 / V540

Flooded Suction Pumps



DAEPUMPS.COM


info@daepumps.com

(760) 821-8112

H540 / V540 Flooded Suction Pump

OPERATING LEVELS		
MIN FLOW	375 GPM	85 m ³ /h
MAX FLOW	1750 GPM	397 m ³ /h
DISCHARGE SIZE	4"	100 mm
SUCTION SIZE	5"	125 mm
SOLIDS HANDLING	3"	76 mm
MAX SPEED	2000 RPM	2000 RPM
SHUT-OFF HEAD	480'	146 m
BEP HEAD	390'	119 m
BEP FLOW	1525 GPM	346 m ³ /h
BEP	68%	68%

PARTS	HYBRID	HIGH CHROME
IMPELLER	CHROME IRON	CHROME IRON
VOLUTE	DUCTILE IRON	CHROME IRON
SHAFT	17-4 P.H. STAINLESS STEEL	17-4 P.H. STAINLESS STEEL
SHAFT SLEEVE	416 STAINLESS STEEL CHR. PLATED	416 STAINLESS STEEL CHR. PLATED
SUCTION COVER	DUCTILE IRON	DUCTILE IRON
BACKPLATE	DUCTILE IRON	CHROME IRON
WEAR PLATE	CHROME IRON	CHROME IRON
MECHANICAL SEAL	TUNGSTEN CARBIDE VS. SILICON CARBIDE	TUNGSTEN CARBIDE VS. SILICON CARBIDE
BEARING FRAME	CAST IRON	CAST IRON
O-RINGS	VITON	VITON

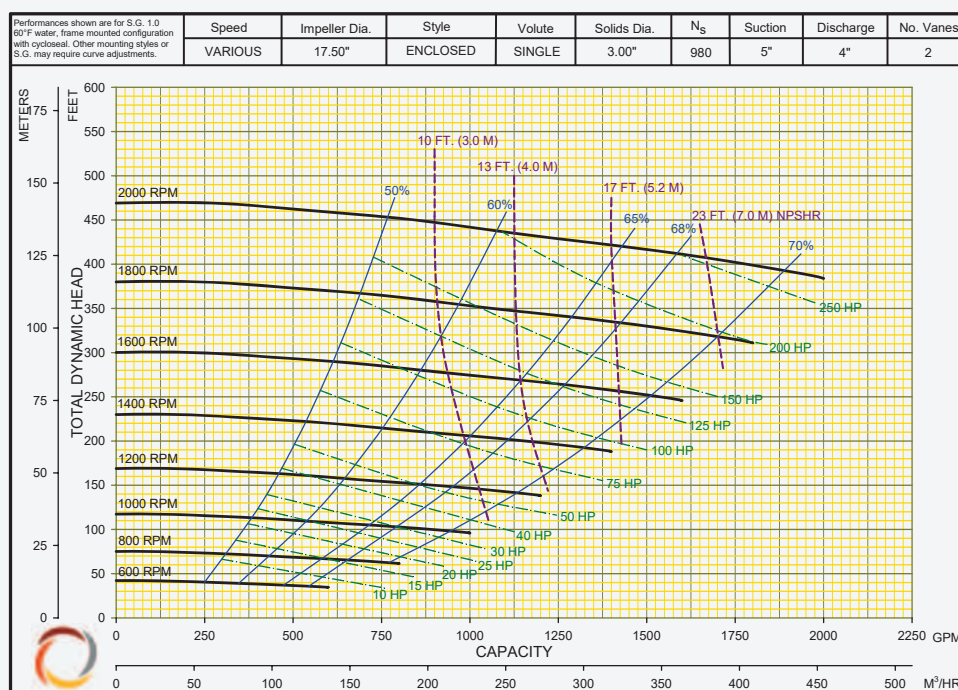

FEATURES

- Flow rates up to 2,000 GPM / Heads up to 470'
- Redi-Prime® available for fully-automatic continuous priming
- RunDry™ option (Indefinite run dry capability)
- Hardness rating > 600BHN provides better wear
- Heavy-duty construction
- Front adjustable wear plate
- Replaceable wear plates